

AC 55

Cummins
Mecc Alte
D+&''



ISO8528	GC ;) &-
SZUTEST	GC - \$\$\$
CE	

2000/14/EC

&\$\$\$#(#

z) \$ z'z' D:

	"	"	"	"	Amp
400/230	55,00	44,00	50,00	40,00	72,00

Standard Specifications

(*) \$\$\$

z

fl ! E

z

z

ALTERNATOR

fl

fl " E

fl \$\$\$ \$\$\$

fl " \$ E

TRANSFER SWITCH

fl

AC 55

Cummins
Mecc Alte
D+&''

Manufacturer		Cummins		
Model		S3,8-G6		
		%\$\$' "# "		
) (' "Q&< DQ		
	L	3,80		
	"	97 x 128		
		17,5:1		
	fl # ı	"# "	1500	
	fl ı	L	11,00	
		L	15,00	
AbsorbedAirDischargeReSourceKey.Text	' # "	3,60		
	' # "	82		
	' # "	5,30		
	° C	546		
		12 V d.c.		
	Load	%\$\$ı	'+)ı) \$ı
	# "			
		12,80	9,50	6,50


		Mecc Alte		
		ECP 32-1L/4		
	Hz	50		
	"	50		
7 cg		0,80		
		3		
	fl ı	400/230		
	A	72		
Temperatur		H		

		fl ı		fl ı	
	"	"	"	"	L
AC 55	855	1780	910	1250	105
		fl ı		fl ı	
	"	"	"	"	L
AK 30	1270	2480	1010	1470	

AC 55

Cummins
Mecc Alte
D+&''

1 D+&''

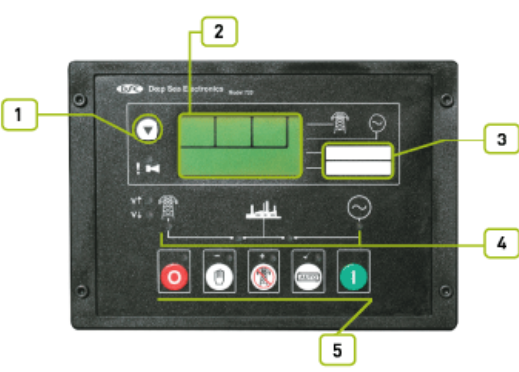

- 1
- 2
- 3
- 4
- 4

2

8G9ž +&\$ž) 5ž&&\$#(\$

3

4

5

8G9'+&\$

8G9'+&\$

fl

8G9'+&\$

ž

fl

ž

ž

fl

%\$\$

ž

#

ž

ž

ž

ž

AC 55

Cummins
Mecc Alte
D+&''

f@BŁ
f@%&@Ł
f@%&@BŁ

#

#

6G'9B *\$-\$) \$
6G'9B *%\$\$!*&
6G'9B *%\$\$!*(

GA 8

%, !&* \$

%&\$)

ž

ž

!%&


"

ž

AC 55

Cummins
Mecc Alte
D+&''

5? " \$!

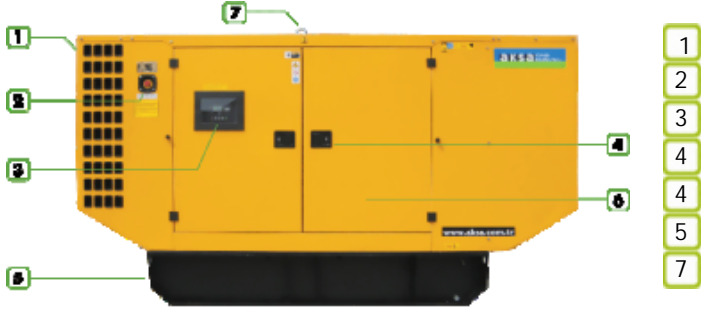

1

Technical specifications and performance data for the AC 55 generator, including power output, fuel consumption, and noise levels. The text is partially obscured by a large watermark.

2

Additional technical specifications and performance data for the AC 55 generator, including power output, fuel consumption, and noise levels. The text is partially obscured by a large watermark.

	"	1010
fl "L	"	2480
fl "L	"	1470